



Dual use Dampers that Do. Flow flushes through. AND Pressure Pulsation is Intercepted  
**PULSE GUARD<sup>®</sup> Inc.**  
 Guard against Pulsation

In USA Toll Free. 1-888-DAMPERS (1-888-326-7377)  
 For the Americas --01(1)910-270-2737 & 2738  
 Faxes : B&W --01(1)910-270-2739 & 40, Color 0320  
 Color Facsimile is 10 times faster than email attach, AND there are no viruses.



LINED WITH PVDF or ECTFE (Please see bottom right) Dual Configuration Flange face, ANSI 150# & 300#, (PN 16, PN 25, & PN 40, on request.)

So G-Lnd 30	42	/	1/2"	150# & 300#	0.5	/	620p	/	1,470	5.5	140	7.8	198	9	/	316	/	DW143
So G-Lnd 60	42	/	1"	150# & 300#	1.0	/	620p	/	2,497	6.2	157	10	254	14	/	316	/	DW175
So G-Lnd 150	42	/	1.5"	150# & 300#	2.5	/	620p	/	3,230	7.7	195	11.42	290	25	/	316	/	DW223

**NOTES: Pre-Filling,** To use any damper rated above 370 Bar / 5,350 psi, at a greater pressure, please specify Pre-Fill Valve Nbr. "M8-M28 f/ss", for use up to 750 Bar /10,800 psi . Add 98 to the listed price of the damper, and 38mm / 1.5" to the length through C/L of the valve.


**PART NUMBER LETTERING ABBREVIATIONS:** "TW" - Twin Connection, is replaced by "FF" for a single Flange Face at no charge, or by "+ Flg". where an added Flange by welding is required because the flange diameter is large than the damper; there is a cost for this. "O" denotes an "O" ring flange face, and is used with a piping base block for in place flush and pressure pulse interception, for quick release change out without disturbing pipe integrity. Part Number prefix "CE/" is used where pressure times volume, or dangerous nature of the liquid, requires certification within a specific danger class by the EC Pressure Equipment Directive. "U" - denotes use of ASME code, which itself states it is Unsuitable for "snubbers" aka dampers. "JKT" - specifies Jacketed for temperature control.

**WETTED PARTS MATERIAL DESIGNATIONS:-** Replace the "ss" in the part nbr. as follows, "DSS" - Duplex Stainless, SDSS- Super Duplex, A20 - Alloy 20, T2 - Titanium 2, H22 - Hasteloy 22, HC 276 - Gr. C276, H2- Gr B2. Tan - Tantalum.

**CONNECTIONS:-** "F" - Female, M - Male, B - BSP, N -NPT, TD - Single Thread, W - Weld Prep 37.5 Degree, SO - Socket for pipe. ("NB") - Nota Bene - Design Pressure "DP" at temperature, will vary by allowable stress for other than dual certified 316/316L "ss" material. The end user has the right to specify that DP is MAWP, at their own risk.

DIN 2501 "DN--PN--" flanges may imply the use of European Pressure Vessel codes. Be aware that they use higher allowable working stresses, so may be less safe than our 30 year proven standard, which has ensured no fatigue failure from strain fluctuation in this cyclic stress application..

**SIMPLIFY & GREATLY REDUCE YOUR PIPING INSTALLATION COST, AND HAVE FULL PERFORMANCE FROM YOUR DAMPER**  
**Connection options, MULTI (up to 6) CONNECTIONS, TO INTERCEPT PRESSURE PULSATION**

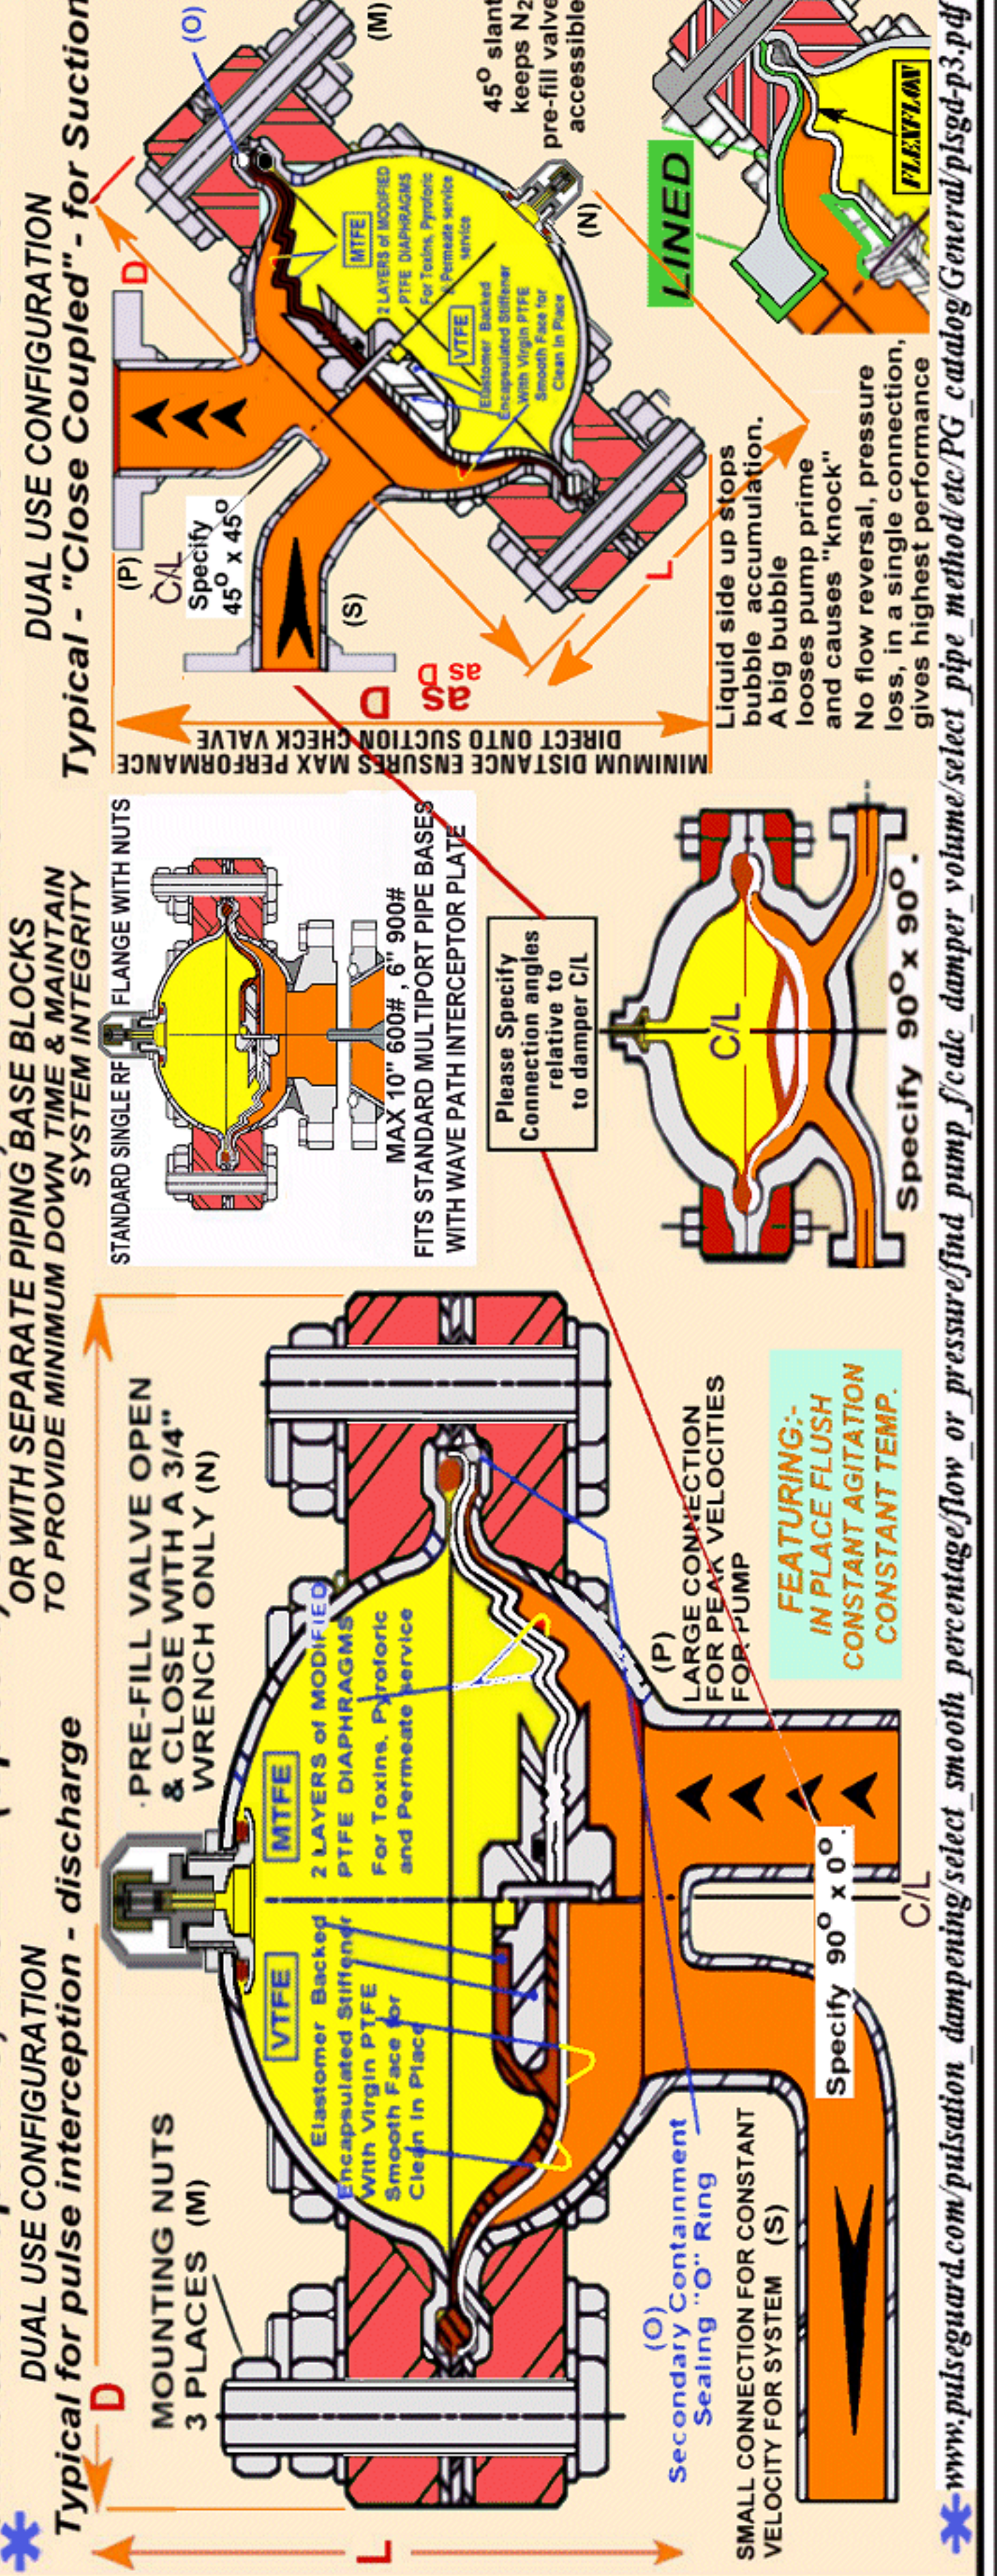

www.pulseguard.com/pulsation\_dampening/select\_smooth\_percentage/flow\_or\_pressure/find\_pump\_scale\_damper\_volume/select\_pipe\_method/etc/PG\_catalog/General/plsgd-p3.pdf